

## The UBK U bracket allows an armature plate to be fitted to a glass door.

### SPECIFICATIONS :



Dimensions : 185 x 62 x 33,5 mm.

Fits glass 8-11mm thick.

The UBK U will accept the 300Kg, 400Kg and 500 kg series of armatures.

### THE UBK U is supplied with :

- 1 U bracket. rep : (1)
- 1 Fixing bracket. rep : (2)
- 1 Rubber. rep : (9)
- 1 Clamping plate. rep : (11)
- 3 Double side tape. rep : (10)
- 6 Screw M4x12. rep : (12)
- 1 Allen key. rep : (13)
- 1 Screw M8x25. rep : (7)

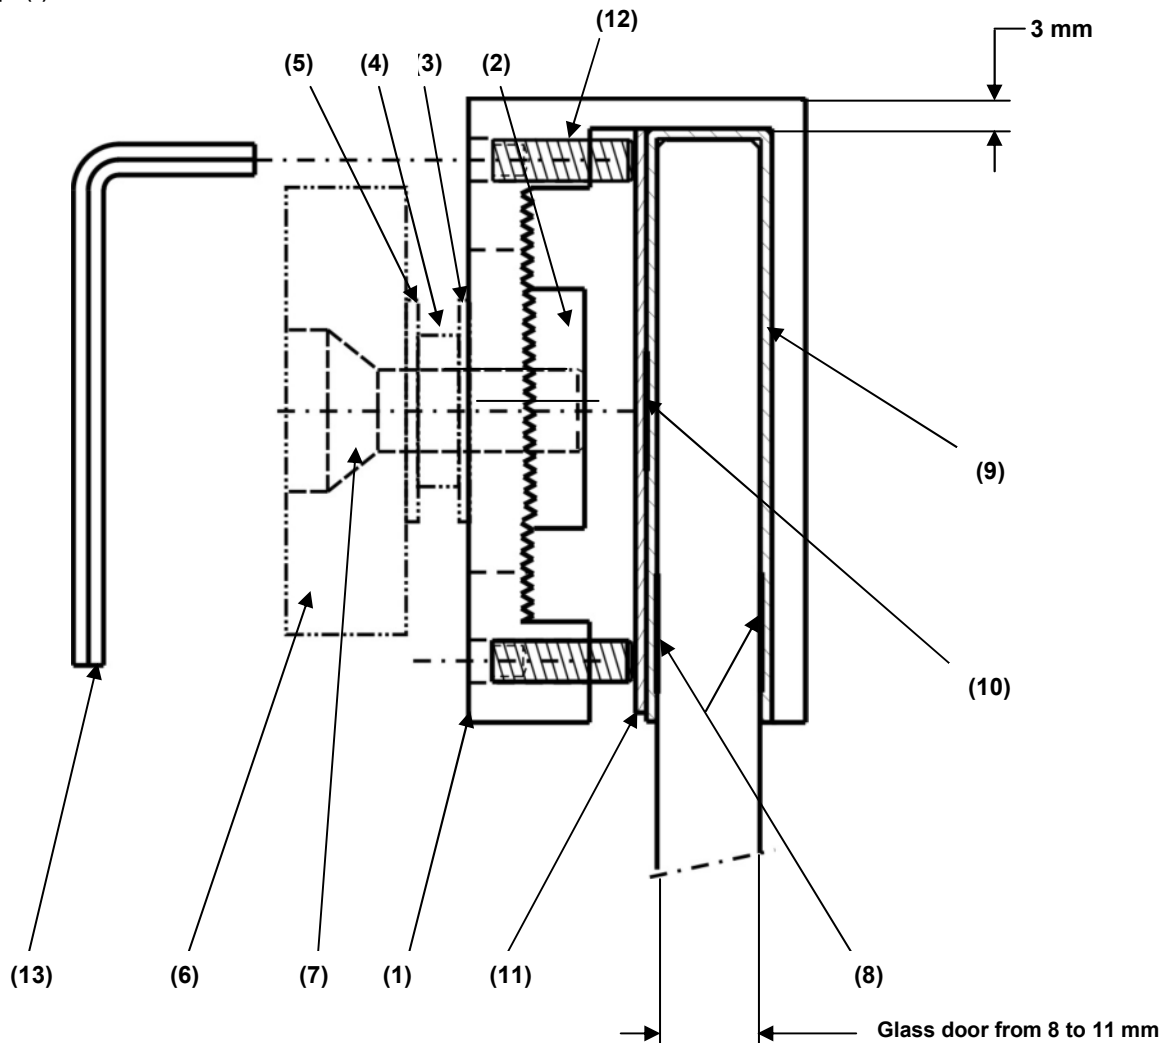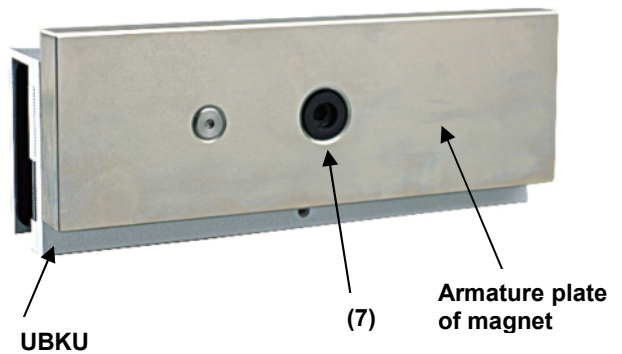

### UBK U FITTING INSTRUCTIONS:

Place the rubber (9) on either side of the door, checking the symmetry – this protects the glass once the UBK U is clamped.

Adhere the rubber (9) to the door.

Place the clamping plate (11) to align on the upper part of the door. Press the clamping plate (11) in order to adhere it on the rubber (9).

Place the U bracket (1) on the rubber (9) and on the clamping plate (11), checking alignment.

Tighten the M4x12 (12) screws by means of the Allen key (13), and ensure UBK U is securely fixed.

### ARMATURE PLATE to UBK U FITTING INSTRUCTIONS:

Insert screw (7) in armature plate (6).

Place a steel washer (5) rubber washer (4) steel washer (3) (rubber washer sandwiched), between the armature plate and the UBK U (as shown in the drawing).

Fix the armature onto the UBK U bracket (1), ensuring the armature plate has free movement (floats).