


DS-2CE56D1T-IRM HD1080p Outdoor IR Turret Camera


TurboHD™

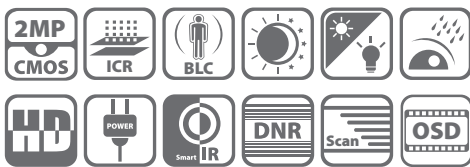

Key Features

- HD1080p Video Output
- HD-TVI Technology
- True Day/Night, Smart IR
- 65 Feet IR Range
- IP66 Weatherproof
- OSD Menu Controlled via UTC

Dimensions

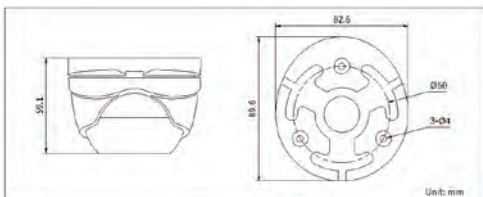

Accessories



Indoor/Outdoor Wall Mount
PC110T



Video Balun
DS-1H18

Order Model

DS-2CE56D1T-IRM

DS-2CE56D1T-IRM	
Camera	
Image Sensor	1/2.7" progressive scan CMOS
HD-TVI Resolution	1920 x 1080
Minimum Illumination	Color: 0.034 @ f/2.5, B/W: 0 with IR
Shutter Speed	1/30 s to 1/50,000 s
Lens	3.6 mm @ f/2.5 (2.8 mm, 6 mm optional)
	105° (2.8 mm), 84.3° (3.6 mm), 55.4° (6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°, rotation: 0° to 355°
Day/Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 30 fps
HD Video Output	1 analog HD output
S/N Ratio	More than 52 dB
Menu	
Camera ID	On/off (0-255)
AGC	Supported
D/N Mode	Color/BW/auto/EXT
White Balance	Auto/user/push
Privacy Mask	On/off, maximum 2 zones
Motion Detection	On/off, maximum 4 zones
BLC	Supported
Anti-Flicker	On/off
Other	Digital noise reduction, mirror image
General	
Working Temperature/Humidity	-40° C to 60° C (-40° F to 140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Maximum 3 W
Weatherproof Ratings	IP66
IR Range	65 feet
Communication	Up-the-Coax Protocol: HIKVISION-C
Dimensions	89.6 mm × 59.1 mm (3.53" × 2.33")
Weight	400 g (0.88 lb)