




4660

POWERCOM SIMPLEBUS B/W CAMERA

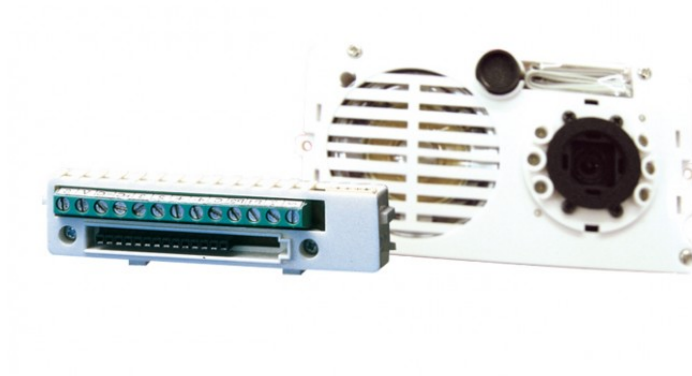

Simplebus system audio-video unit with terminal board complete with camera pin-hole CCD 1/4' black and white adjustable from the front, and LED camera illumination. Complete with audio speaker unit with double amplifier, watertight loudspeaker and electret microphone. Both, microphone and loudspeaker volumes, can be adjusted from the front. To be inserted in modules arts. 3321/0, 3321/1 and 3321/2. Dimensions: 102x55x35 mm



4660

POWERCOM SIMPLEBUS B/W CAMERA

GENERAL DATA

Height (mm)	55
-------------	----

CAMERA FEATURES

Sensitivity (lux)	0.50
-------------------	------

ENVIRONMENTAL AND COMPLIANCE FEATURES

Operating temperature (°C)	-25 ÷ 55
----------------------------	----------

GENERAL FEATURES

Maximum current absorption (mA)	300
Simplebus 2 audio system	Yes
Type of camera	B/W
Video output	1Vpp 75PAL



4660

POWERCOM SIMPLEBUS B/W CAMERA

ACCESSORIES



1216 SIMPLEBUS2 LINE TERMINATION TERMINAL

Line termination terminal. To be mounted at the end of the riser, according to the indications given in the technical documentation, to optimise distribution of the signals.