

LDWB-IR212P-AHD2

2MP 1080p AHD IR Indoor Dome Camera



The LDWB-IR212P-AHD2 internal dome camera delivers unparalleled image quality with 1920(H) x 1080(V) resolution.

The cameras' unmatched wide dynamic range (WDR) capability ensures that scenes are faithfully reproduced without excessively dark or bright areas being compromised, the WDR capability also ensures much more accurate colour rendition over the entire scene.

Superior WDR also equips the camera to deal with very difficult lighting conditions, such as looking out of dark areas into brightly lit areas - even in the most demanding lighting conditions the camera delivers scene accuracy and image quality that cannot be achieved with other imaging technologies.

The aesthetic and unobtrusive housing design allows the camera to blend into almost any internal installation environment, and the three axis mount allows very flexible camera positioning.

The combination of very high resolution, superb image quality and 3D noise reduction ensure that modern DVRs can take advantage of the best possible recorded image quality whilst ensuring the best HDD storage efficiency.

Key features

- ▶ 2MP 1080p Performance
- ▶ True Day/Night
- ▶ IR built in up to 20m
- ▶ 12vdc / 24vac Power
- ▶ Transmission distance 300-500 meters
- ▶ Surface or Flush Ceiling Mount

LDWB-IR212P-AHD2


AHD Indoor Dome Camera

Specifications

Description / Model	LDWB-IR212P-AHD2
Sensor	1/2.8" SONY322+NVP2441
Effective Pixels	1920(H)x1080(V)
Video Frame Rate	25/30fps@1080P
Max. transmission distance	500M
Video format	PAL/NTSC
Min-illumination	0Lux (IR ON)
S/N Ratio	More than 80dB (with AGC OFF)
OSD	Support
AGC	AUTO
White Balance	AUTO
Backlight	AUTO
NR	2D-DNR/3D-DNR
Brightness	Adjustable
Smart IR	Support
Sync code	Internal
Voltage	DC12V/AC24V
Current	210mA±15%(IR ON);80mA±15%(IR OFF)
DAY/NIGHT	Support ICR
Lens	2.8-12mm
IR range	20m
Waterproof standard	IP66
Video output	AHD/CVBS
Storage temperature	-20°C ~70°C
Operating Temperature	-10° ~ 50°C RH90% MAX
Weight (approx)	265g

NB. Specification subject to change without notification

Dimensions

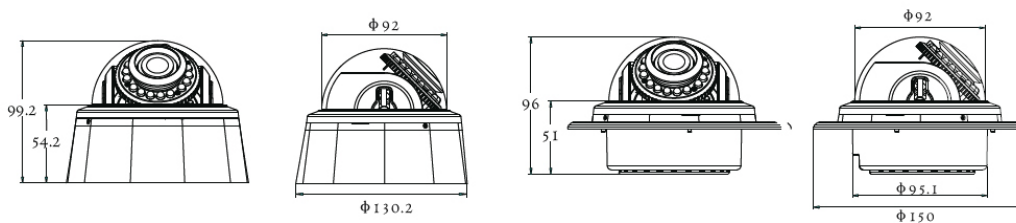

Ceiling or Wall mounted: 130mm(φ)*99.2mm(H)

Embedded: 150mm φ*96mm(H)

*Illustrates Flush Ceiling Mount