




DOUBLE SLIMLINE MAGNETIC LOCK (600LB)

MAGNETIC LOCK

FIRE TESTED to
BSEN1634-1:2014 & BS476:Part22:1987
(30, 60, 90 & 120 min timber door-sets)



ML600-D / ML600-D-M

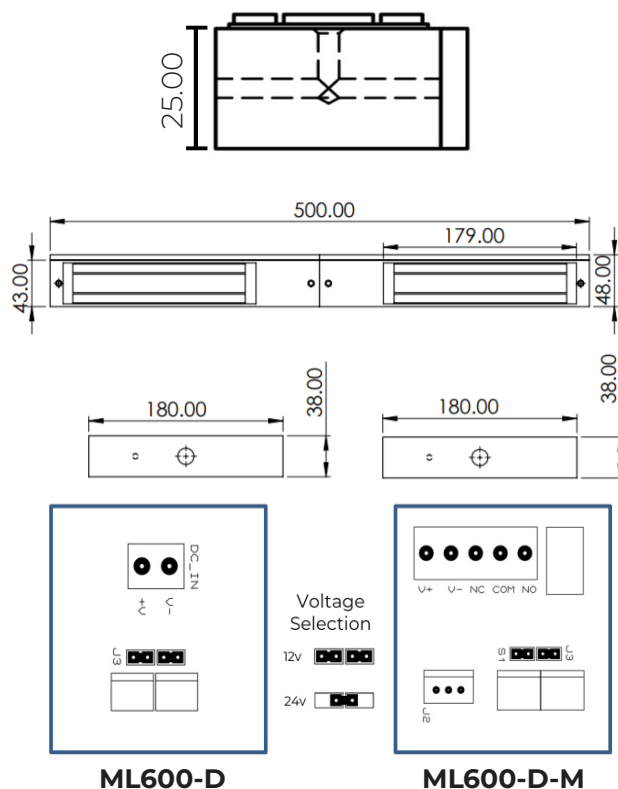

Fire tested range of maglocks and brackets from a market leader in access control.

SPECIFICATION

ML600-D / ML600-D-M

- Aluminium housing
- Dual voltage 12/24 VDC @ 480/240mA x 2
- 280kgs (600lb) holding force x 2
- Built in surge protection
- Surface mount
- Fail safe operation (power to lock)
- +/- 15% voltage tolerance
- -10° to +50° operating temperature
- Push off release pin on armature

ML600-D-M only

- Monitored
- Voltage free relay contacts

FEATURES

ML600-D / ML600-D-M

- Fire rated (30, 60, 90 & 120 min timber door set)
- Slimline mini magnet
- Clean and compact design
- No residual magnetism
- Power LED indication on ML600-D (Red LED only)
- Status LED indication on ML600-D-M (Red to Green)

Suitable Brackets/Housings:

- BK600-D-ZL (Double ZL bracket)
- BK600-D-L (Double L Bracket)
- BK600-D-FL/AB (Architectural FL) x 2
- AB600ZL-DC (Architectural ZL) x 2
- AB600CL (Architectural L) x 2
- AH600 (Required for Fire Doors) x 2
- BK600U (Glass door bracket) x 2
- GD600ZL (Glass Door ZL) x 2

OTHER PRODUCTS

EBCBWC02/DR



EXTR02



ML600



DU-GB/PTE



DIMENSIONS

ML600-D / ML600-D-M

- 500x42x25 (mm) Maglock
- 180x38x13 (mm) Armature x 2
- 3.94kg Boxed
- 2.26kg Unboxed

CONTENTS

ML600-D / ML600-D-M

- Double slim line mini magnet (600lb)
- Armature plate x 2
- 600GB fixing kit x 2
- Instructions
- Armature fixing template



Manufactured by a BSIA Member