

# WIP13BV

## 1.3MP IP IR Bullet Camera




WIP13BV

### Key Features

- 960P Full Real-Time Coding
- Up to 25m IR Distance (In Ideal Conditions)
- 2.8 - 12mm Megapixel Lens
- 3D DNR
- Digital WDR
- CVBS Local Video
- True Day / Night
- MIC / Line in G.711A / U Audio Codec
- Two Way Audio
- IP and MAC Address Filtering
- Configuration Backup
- Image Export to Micro SD Card
- Alarm Image Size Dependent on Set Stream Resolution
- RTSP Streaming with or without Authentication
- Mirror & Flip Image
- Physical Alarm Output
- Alarm Trigger and Alarm Input with Own Scheduler
- Remote Monitoring
- Supports Smart Phones & Tablets, P2P Connectivity

### Dimensions (mm)

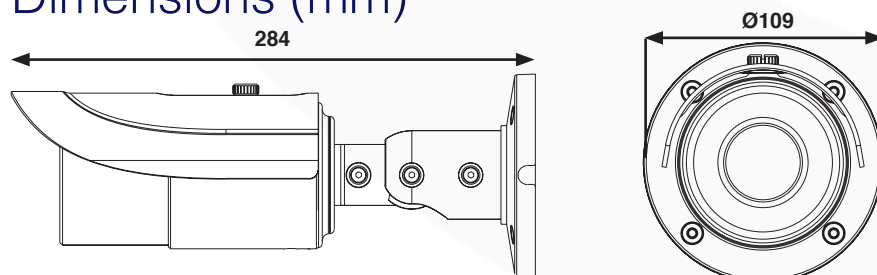

www.geniecctv.com  
 sales@geniecctv.com  
 T: +44 (0) 1707 330 541  
 F: +44 (0) 1707 330 543

Genie CCTV Ltd.  
 CCTV House, City Park,  
 Watchmead,  
 Welwyn Garden City,  
 Hertfordshire,  
 AL7 1LT,  
 United Kingdom

## Technical Specification

Model Number	WIP13BV
Image Sensor	1/3" CMOS
Image Pixels	1280 x 960
Electronic Shutter	1/25s ~ 1/100,000s
Minimum Illumination	0 Lux (IR LED ON)
Lens	2.8 ~ 12mm
Lens Mount	Φ14 Mount
WDR	Yes
3D DNR	Yes
Video Compression	H.264
Resolution	960P (1280 x 960), 720P (1280 x 720), VGA (640 x 480), QVGA (320 x 240)
Multi-Stream	1280 x 960 (1-30fps) / 1280 x 720 (1-30fps) 1280 x 720 (1-10fps) / 640 x 480 (1-30fps) / 320 x 240 (1-30fps)
Bit Rate	64Kbps ~ 4Mbps
Encode Mode	VBR / CBR
Quality	Five Levels Under VBR, Freely Adjustable Under CBR
Image Settings	Saturation, Brightness, Contrast, etc Adjustable through Client Software or Web Browser
Audio Compression	G711A
Network Interface	RJ45
Video Output Interface	BNC x1
Audio Interface	Two Way Audio (MIC In x1, MIC Out x1)
Storage Card	Support TF Card, Up to 64GB
RS485	Yes
Alarm Input	1 Ch
Alarm Output	1 Ch
Remote Monitoring	IE Browsing, CMS Remote Control
Online Connection	Support Simultaneous Monitoring for up to 4 Users Support Multi-Stream Real Time Transmission
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	TF Card Local Storage, Network Remote Storage
Smart Alarm	Motion Alarm, Sensor Alarm
Day & Night	ICR
PTZ	RS845 x1
PoE	Yes
IR Distance	Up to 25m (In Ideal Conditions)
IP Rating	IP66
Power Supply	DC12V / PoE
Operating Conditions	Temperature: -40°C ~ 50°C Humidity: 10% ~ 90%
Dimensions (Ø x L)	Ø109 x 284 mm
Weight	1115g

Features and specifications are subject to change for further improvement without any notice

## Accessories

- **WIPJBBV** - Junction Box for WISH IP Bullet Cameras
- **FILTERKIT4** - Filter Set Up Kit
- **PSU2SM** - In-Line DC12V 2A Output, Regulated Switch Mode PSU with Fixing Mount
- **POE-INJ01** - PoE Injector, Single Port