

Handset Intercom

MASTER

1



SUB

3

AT-406



COMMERCIAL & INSTITUTIONAL APPLICATION SYSTEM

Master station



AT-206
Master station

Sub station



AT-306
Sub station

Boxed set



AT-406
Boxed set (white color)
AT-406P
Display pack

Power supply
PS-0603DIN or Batteries
→ P.100



AT-406B/A
Boxed set(charcoal gray)

Lineup




TAR-3
External signaling
relay
→ P.98

Features


- Handset master-sub intercom w/2 additional subs (optional)
- Battery status LED
- Batteries or DC power supply
- Buzzer or bell activation (optional)

Communication network

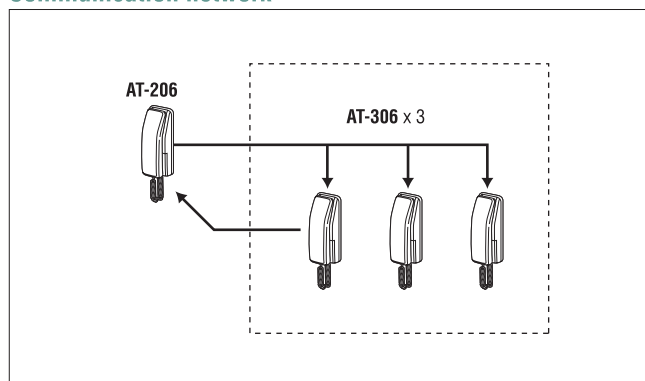


Master calls all the subs simultaneously, while the sub rings the master only.

Unit dimensions

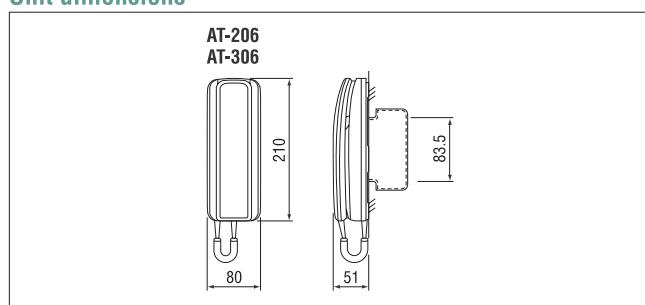

Wiring

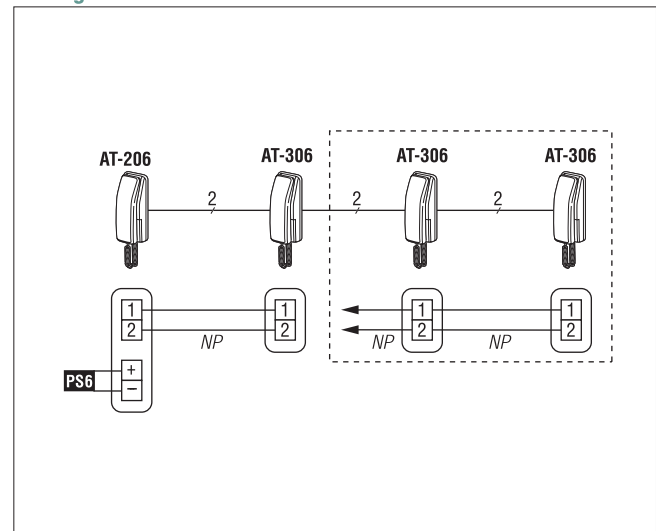

PS6 : PS-0603DIN

Specifications (AT-406)

Power source	6V DC, 150mA
Power supply	PS-0603DIN or Batteries "AA" (SUM-3) x 4 pcs
Communication	Press CALL button to ring all subs. Pick up any phone. Sub rings master only. Common talk.
Wiring	2 parallel wires, non-polarized
Distance	2-station set 700m(0.65mmø) 1000m(0.8mmø) AT-206 to subs 1~3 400m(0.65mmø) 600m(0.8mmø)