

Datasheet

VIDEO ENTRY/ CDV-91S - 1-way door station

Product description

The CDV-91S is a modern slimline door station available as a single button unit only.

Part of the 2EASY range, the CDV-91S is compatible with all 2EASY 2-wire system models and is included in all CDV4791S-DX Kits.

The modern low profile styling suits all environments and features a 170° camera with audible operation annunciation such as "call is in progress".

2EASY




Key features

- Improved sleek design
- 170° fisheye camera
- Integral Microphone
- Audible annunciation
- Live viewing
- Answer the door via the app
(only with CDV-47DX monitor)

 *Certification*

 *DEEE*

RoHS *Certification*

 *-15°C to 55°C*

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - March 2020 - CDVI_CDV-91S_DS_02_EN_A4_C

Product Information

Material: Stainless steel panel

Mounting: Surface mount

Unlocking time: 1 to 99s

Camera: Color CMOS, 2.0 mega pixel,
1/2.7" fisheye camera,
17000 wide angle

Output Specifications

Number of relay circuits: 1
(2 lock outputs with CDVI-RLC,
applicable on the monitors only)

Electrical Specifications

Power supply: 24Vdc



Power consumption:

Standby: 15mA


Working: 105mA3

Lock power supply: 12Vdc, 280mA
(Internal power - fail secure only)

Wiring: 2-wire, no polarity

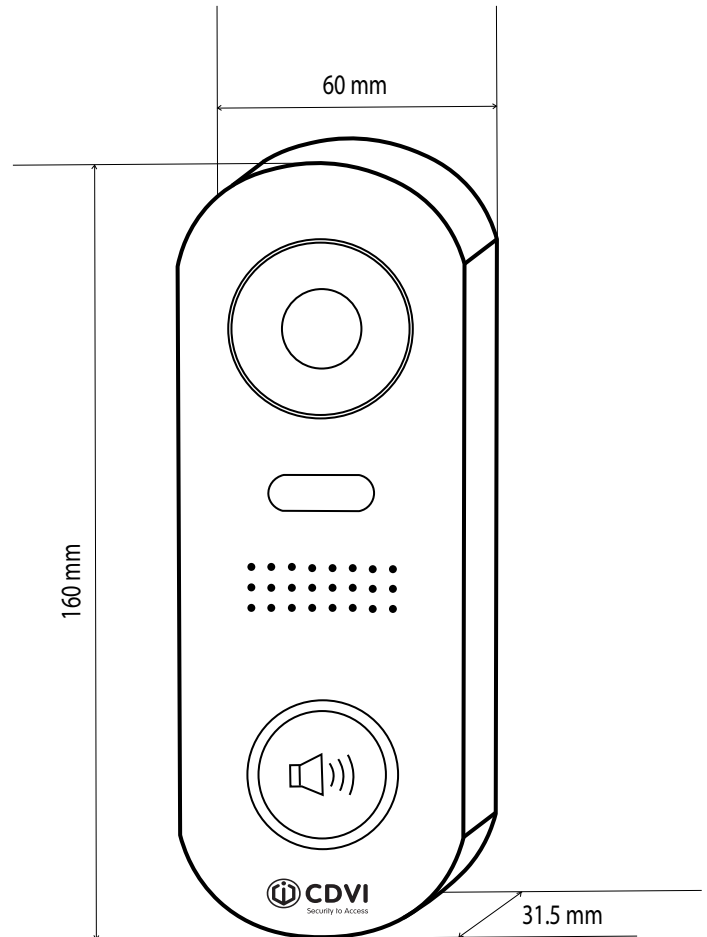

**Download the app
today!**



Search: VDP Connect