

DH-HAC-ME1200A

2MP HDCVI PIR Cube Camera



HDCVI

- Max 30fps@1080P
- HD and SD output switchable (video only)
- 2.8mm/3.6mm fixed lens
- 10m/110° detecting range/angle
- DC12V



System Overview

This MotionEye model is an indoor dual detection camera which uses both video and infrared sensor to achieve motion detection and PIR functionality, reducing false alarms and ensuring the accuracy and effectiveness of real-time alarm information. Built-in PIR and coax alarm output makes the camera an ideal choice for applications which require video verification of intrusion alarms, such as courtyards, offices, warehouses, stores, etc.

Functions

Wide Detection Range

Designed with Fresnel lens, the PIR of MotionEye is able to cover wide monitoring range with horizontal angle of view up to 110° within a distance from 2m to 10m.

Dual Detection

The detection accuracy is well guaranteed with both motion detection and PIR detection, which can eliminate the number of false alarms you receive. With the advantage of dual detection technology, your HDD will now last longer and not be recorded with false alarms. Gone are the days of alarms caused by heavy wind or rain. Instead, only true threats will instantly trigger an alarm and allow you to protect your loved ones.

Covert Surveillance

The camera integrated in MotionEye adopts cone-shaped pinhole lens which is hidden in the PIR case. Therefore, the video monitoring can hardly be realized.

Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 800m transmission via coaxial cable, and up to 300m via UTP cable*.

*Actual results verified by real-scene testing in Dahua's test laboratory.

Multi-formats (Video Only)

The camera supports multiple video formats including HDCVI, CVBS and other two common HD analog formats in the market. The four formats can be switched over through by PFM820 (UTC controller). This feature makes the camera to be compatible with not only HCVRs but also most end users' existing HD/SD DVRs.

Tamper-proof Design

The device is designed with a built-in tamper switch to prevent itself from malicious separated. Once the case is damaged and the tamper switch is triggered, alarm info will be uploaded immediately.

Protection

With PIR working temperature range of -10 °C to +50 °C (+14 °F to +122 °F), the MotionEye is designed for extreme temperature environments. Supporting ±30% input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Technical Specification

Camera

Image Sensor	1/2.7" CMOS
Effective Pixels	1920(H)×1080(V), 2MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Minimum Illumination	0.02Lux/F2.4(Color), 0.002Lux/F2.4(B/W)
S/N Ratio	More than 65dB
IR Distance	N/A
IR On/Off Control	N/A
IR LEDs	N/A

Lens

Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Focal Length	3.6mm (2.8mm optional)
Max Aperture	F2.4
Angle of View	H: 96°(107°)
Focus Control	N/A
Close Focus Distance	500mm (500mm) 19.7" (19.7")

DORI Distance

Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.

	DORI Definition	Distance
Detect	25px/m (8px/ft)	2.8mm: 41m(134ft) 3.6mm: 49m(162ft)
Observe	63px/m (19px/ft)	2.8mm: 16m(53ft) 3.6mm: 20m(65ft)
Recognize	125px/m (38px/ft)	2.8mm: 8m(27ft) 3.6mm: 10m(32ft)
Identify	250ppm (76px/ft)	2.8mm: 4m(13ft) 3.6mm: 5m(16ft)

Pan / Tilt / Rotation

Pan/Tilt/Rotation	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°
-------------------	---

Video

Resolution	1080P (1920×1080)
Frame Rate	25/30fps@1080P, 25/30fps@720P
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)
Day/Night	Electronic

OSD Menu	Multi-language
BLC Mode	BLC / HLC / DWDR
WDR	DWDR
Gain Control	AGC
Noise Reduction	2D
White Balance	Auto / Manual
Smart IR	N/A

PIR

Detection	Passive infrared
Detection Range	10m, 110°
Installation height	Default bracket, wall mount, 2.2-3m

Certifications

Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
----------------	---

Interface

Audio Interface	N/A
-----------------	-----

Electrical

Power Supply	12V DC ±30%
Power Consumption	Max 0.8W (12V DC, IR on)

Environmental

Operating Conditions	-10°C ~ +50°C (+14°F ~ +122°F) / Less than 95% RH * Start up should be done at above-10°C (14°F)
Storage Conditions	-10°C ~ +50°C (+14°F ~ +122°F) / Less than 95% RH
Ingress Protection & Vandal Resistance	N/A

Construction

Casing	Plastic
Dimensions	120mm×62mm×58mm (4.72"×2.44"×2.28")
Net Weight	0.13kg (0.29lb)
Gross Weight	0.18kg (0.40lb)

Ordering Information

Type	Part Number	Description
2MP Camera	DH-HAC-ME1200AP 2.8mm	2MP HDCVI PIR Cube Camera, PAL
	DH-HAC-ME1200AN 2.8mm	2MP HDCVI PIR Cube Camera, NTSC
	DH-HAC-ME1200AP 3.6mm	2MP HDCVI PIR Cube Camera, PAL
	DH-HAC-ME1200AN 3.6mm	2MP HDCVI PIR Cube Camera, NTSC
Accessories	PFM800-E	Passive HDCVI Balun
	PFM800-4MP	Passive HDCVI Balun
	PFM801-4MP	Passive HDCVI Balun with Power
	PFM321	12V 1A Power Adapter
	PFM320D-015	12V 1.5A Power Adapter

Accessories

Optional:



PFM800-E
Passive HDCVI Balun



PFM800-4MP
Passive HDCVI Balun




PFM801-4MP
Passive HDCVI Balun
With Power



PFM321
12V 1A Power
Adapter



PFM320D-015
Power Adapter

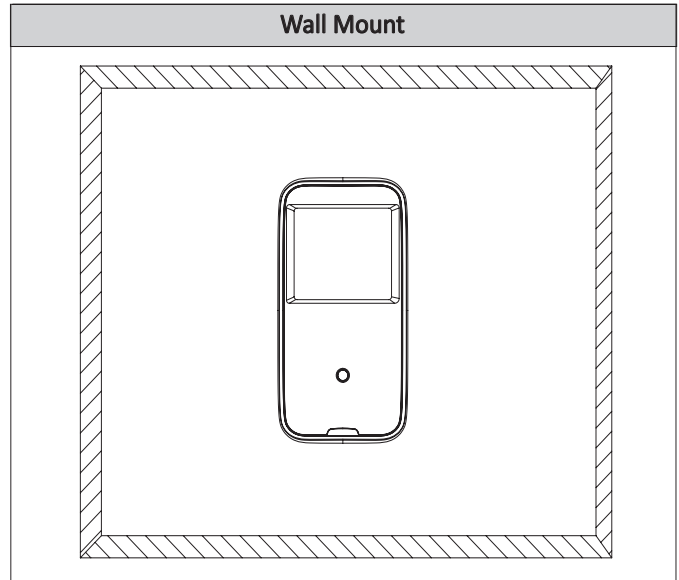

Dimensions (mm/inch)

