

Datasheet

STANDALONE ACCESS CONTROL/ DTRR1434-R - Self-contained long range reader

Product description

Digitag LR Standalone offers users real "hands-free" access control at affordable prices. Up to 30 users can be programmed into the reader.

Digitag LR is ideally suited for use in hospitals, residential homes, areas of stock movement or simply where the convenience of hands-free access control is preferred.

The range attenuation, together with the ease of installation and the flexibility of being standalone has made Digitag LR a leader in this field.



Key features


- Self contained, standalone reader/controller
- Up to 30 users
- Adjustable read-range of up to 15m
- Integral lock relay and exit button input
- Audible and visual signal
- Uses DTXT range of cards

 *Certification*

 *DEEE*

 *Certification*


 *IP54*

 *-30°C to 60°C*

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - April 2020 - CDVI_DTRR1434-R_DS_03_EN_A4_C

Receiver

Material: polycarbonate
Operating Voltage: 12V to 30Vdc
Current: 40mA
Output: Clock & Data ISO / CDVI Protocol
Frequency: 433.93 MHz
Sensitivity: -102dBm
Relay: FORM C Relay NO/C/NC
Input: Exit button
Adjustable read range: 0.5 - 15m
LED: 1 green and 1 red
Antenna: Internal
Tags in field: 20

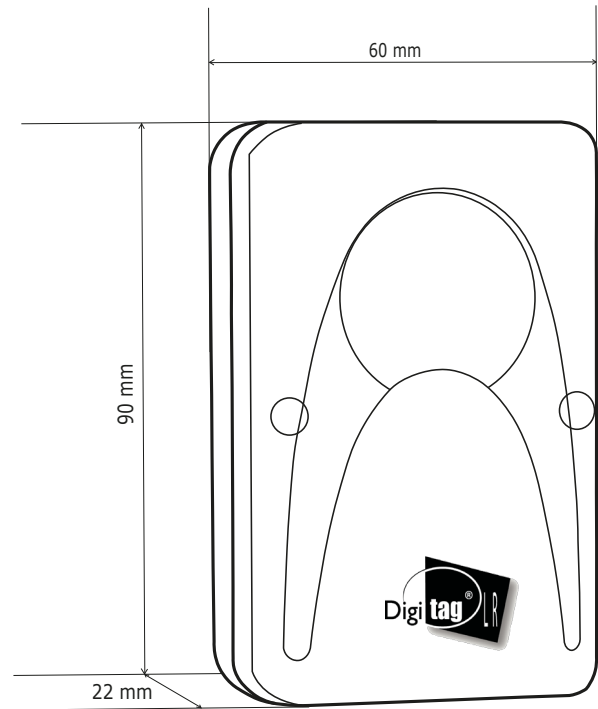

Transmitter

Supply: 3V
Battery: CR2032
Frequency: 433.92MHz Modulation: FSK
E.r.p: 5µW

