


EM40 Standard double magnet monitored

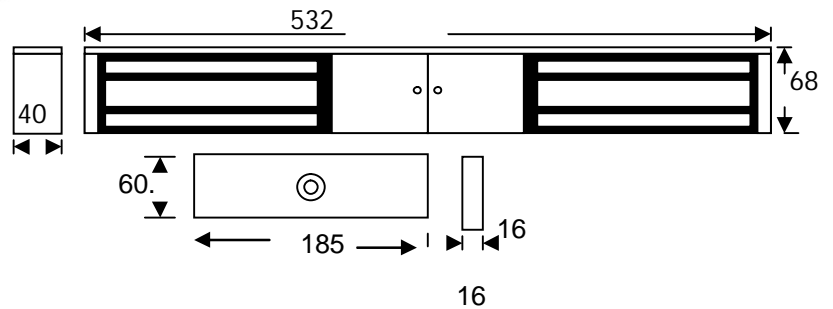


The EM40 series lock is a surface mount double “face to face” electro-magnetic lock offering up to 600lb of holding force per leaf * these locks can be used on either out-swing or inward opening doors. A wide range of accessories are provided to solve your locking solutions.

PLEASE NOTE: Holding force is dependent on door construction

Features:

- High reliability
- Lock monitoring
- Surface mount
- Fail-safe operation (Power to Lock)
- 1 Year warranty
- Anodized aluminium housing.
- MOV provides spike & surge protection.
- Dual voltage 12 or 24 VDC (selectable).
- Anti-residual magnetism designed
- Additional door monitoring (Optional) EM40DS
- Voltage Tolerance: +/- 15%
- Current Draw: 500mA@12Vdc:250mA@24Vdc (at temperature 20C)
- Operating Temperature:-10~55C(14~131F)
- Humidity: 0~95% non-condensing.
- Holding Force: Up to 1200 Lbs (550kg)
- Dimensions:
Magnet (L) 532 (H) 68. (W) 40mm
Armature Plate: (L) 200. (H) 60. (D) 16mm
- Weight (Approx.) 10.0Kg

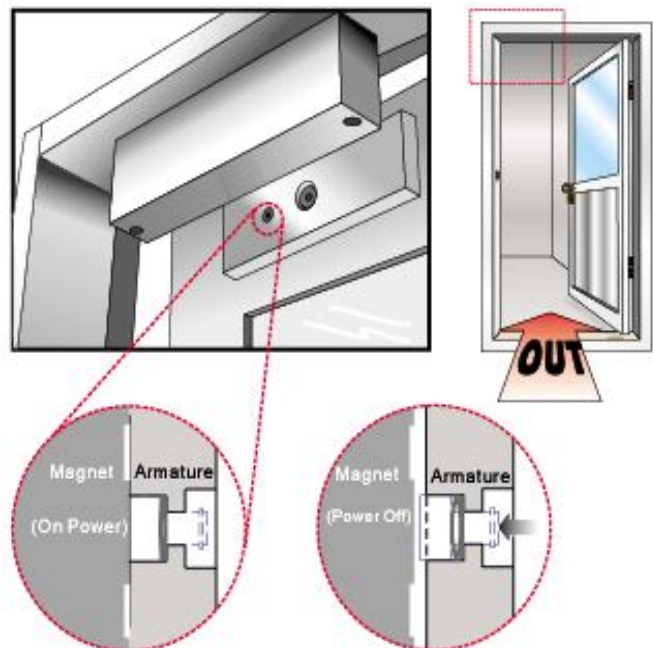

Anti-Residual design

When the power is on the spring loaded plunger is depressed on power begin cut the plunger will push the armature away from the face of the armature