



NETWORK Bridge

The GJD NETWORK Bridge allows any GJD IP enabled device to connect and integrate with supported third party video management software such as the Avigilon VMS.

- NETWORK Bridge supports up to 50 I/O
- Includes an intuitive web browser interface to discover GJD IP products on the same network as the NETWORK Bridge
- PoE or PSU connected power input

Supported Third Party Integration

Avigilon

Milestone

PRODUCT CODES

GJD1060 NETWORK Bridge




Works with the following GJD products

D-TECT 2 IP	GJD230
D-TECT 3 IP	GJD260
D-TECT 50 IP	GJD250
Laser-Watch	GJD515
IPAnything	GJD516


Clarius IR IP	IM-8-IP / IM-9-IP
Clarius WL IP	VM-CW-IP
Clarius Hybrid IP IR/WL	HL-8-CW-IP / HL-9CW-IP

SPECIFICATIONS FOR SUPPLIED PSU

INPUT	AC100-240V~50/60Hz 0.8A
OUTPUT	DC 5.0V  3.0A 15.0W
CERTIFICATION	CE, UL

SPECIFICATIONS FOR UNIT

PoE	802.3af up to 13W
Consumption	4-5W

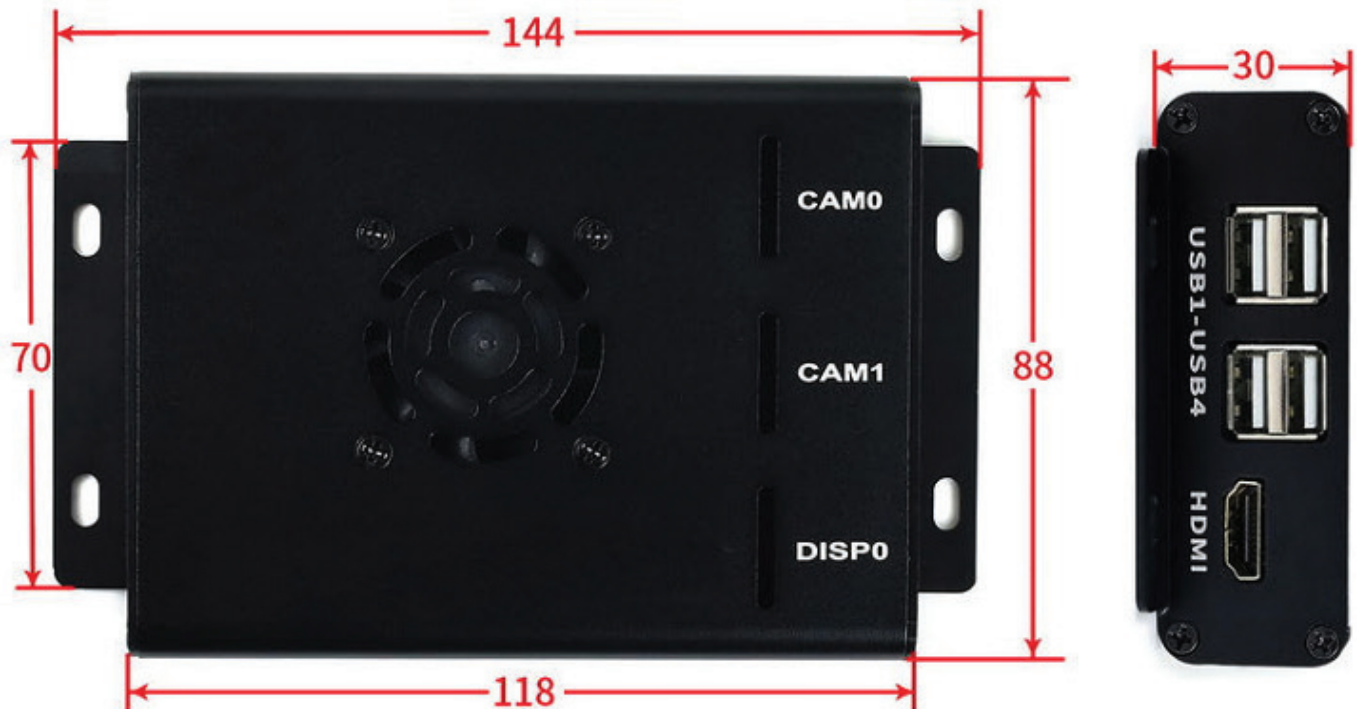

Please note GJD reserve the right to change the information within this document, without notice.

www.gjd.co.uk | info@gjd.co.uk | +44 (0) 1706 363 998

Unit 2 Birch Business Park, Whittle Lane, Heywood, Greater Manchester, OL10 2SX, UK

