



GVGA-COM

VGA to Video Converter

The GVGA-COM is a VGA to BNC Converter that also features additional VGA Output allowing for a VGA loop through. This means you can simultaneously view video on a VGA Monitor and traditional analogue BNC monitor.



Top View



Front View



Back View

GVGA-COM

Key Features


- Dual Output Ports: Composite Video (BNC Connector) and VGA (DB15)
- Allows connection from DVR with VGA Output to existing analogue BNC monitor.
- Video Standards: NTSC/NTSC-EIAJ/PAL/PAL-M/PAL-N/SECAM
- Resolution Support: 640 x 480 (up to 85 Hz), 800 X 600 (up to 85 Hz) and 1024 x 768 (up to 75 Hz)
- Input Video System 50 to 60Hz Frame Rate Detection (NTSC/PAL)
- Input Port: VGA (DB15)
- Image Controls: Horizontal and Vertical Size, Brightness, Contrast, Hue, Saturation, Sharpness and on screen display background.
- Simple and Quick to install, Windows and Mac Compatible. No Drivers required.

Technical Specification

Model Number	GVGA-COM
Input Signal	VGA x1
Output Signal	Composite Video (BNC) x1, VGA x1 15pin D Female Connector
Power Consumption	500mA
Power Supply	DC5V 1Amp Regulated Power Supply
Temperature	Operation: 0 to 55°C Storage: -20 ~ 85°C Humidity: Up to 95%
Dimensions	125 x 95 x 30
Weight	265g

Genie CCTV reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.

Dimensions (mm)

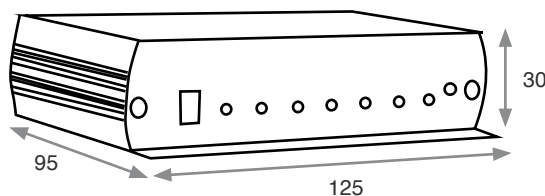



Technical Specification

Model Number	GVGA-COM
Input Signal	VGA x1
Output Signal	Composite Video (BNC) x1, VGA x1 15pin D Female Connector
Power Consumption	500mA
Power Supply	DC5V 1Amp Regulated Power Supply
Temperature	Operation: 0 to 55°C Storage: -20 ~ 85°C Humidity: Up to 95%
Dimensions	125 x 95 x 30
Weight	265g

Genie CCTV reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.

Dimensions (mm)

