


# LMEG15, LMEG17, LMEG19

15", 17" & 19" LED Glass Monitor's

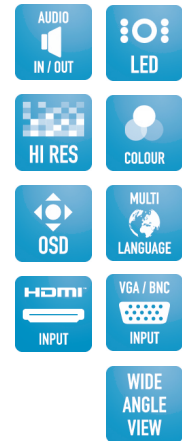

The LMEG15, LMEG17 & LMEG19" LED Glass Fronted Monitors offer excellent picture quality and a sleek and pleasant design normally associated with higher end units. An impressive 1000:1 contrast ratio and 1280 x 1024 resolution and response time of 5ms gives you the ultimate performance and delivers crisp clear images (spec for 17 & 19" models mentioned above)

This range of monitors also feature HDMI, VGA & BNC input capabilities providing various connection options. The slim design maximises desktop space and makes a perfect fit for almost any office or commercial application. The desk mount can be easily removed to allow the monitor to be fitted with any 100 x 100mm VESA accessory.

## Key Features

- ▶ 1280 (H) x 1024(V) Resolution (17 & 19" only)
- ▶ Wide Viewing Angle
- ▶ High Contrast Ratio
- ▶ Built in Speakers
- ▶ HDMI, BNC & VGA
- ▶ Multi language OSD
- ▶ Slim Design
- ▶ Fast Response Rate

V1.01

# LMEG15, LMEG17 & LMEG19

15", 17" & 19" LED Monitors

## Specifications

Description / Model	LMEG15	LMEG17	LMEG19
<b>MONITOR SPECIFICATION</b>			
Panel Type	15" (4:3) LED Monitor Glass Front	17" (4:3) LED Monitor Glass Front	19" (4:3) LED Monitor Glass Front
Case Type	Metal		
Max Resolution	1024 (H) x 768 (V)	1280 (H) x 1024 (V)	1280 (H) x 1024 (V)
Pixel Pitch	0.297 (H) x 0.297 (V) mm	0.264 (H) x 0.264 (V) mm	0.294 (H) x 0.294 (V)
Bezel Thickness	Side: 14.75mm Top: 17.25 Bottom: 17.25mm	Sides: 14.3mm Top: 17.6mm Bottom: 17.6mm	Top & Bottom: 14.1mm, Sides: 13.5mm
Active Display area	304.128 x 228.096 (V) mm	337.920 x 270.336 (V) mm	376.32 (H) x 301.056 (V) mm
Contrast ratio	700:1	1000: 1 Ratio	1000: 1 Ratio
Brightness	350 cd/ m <sup>2</sup>	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>
Response time	8ms	5ms	5ms
Display Colours	16.7 M		
Video Synchronization	Yes		
PC Compatible Frequency	30-80KHz(H) / 50-75Hz(V)		
Viewing Angle	U/D: 65° / 60°, L/ R: 70° / 70°	U/D: 85° / 85° L/R: 89° / 89°	U/D: 85° / 85° L/R: 89° / 89°
Adjustable Colour Temperature	9300K / 6500K / 5800K / User		
Video Compatability	Multi-Standard for NTSC / PAL		
Aspect Ratio	4:3 Ratio with 16:9 Option	4 : 3	4:3
VGA Auto Frequency Correction	Yes		
Speaker	Multimedia Speakers		
Number of Speakers	Right x 1 Left x 1, 2.5W		
Sound Demodulation	Stereo, Audio		
Mute	Yes		
Work Temperature / Humidity	Temp: 20 % - 70 % / Humidity: - 10 to 50 °C		
Volume +/- Power ON/OFF	Yes		
Video Interface	HDMI x1 VGA x 1 BNC x 2 In / BNC x 1 Out		
Audio Interface	Audio in x 1, Audio L x 1, Audio R x 1		
Power Interface	AC In x 1		
Termination	75 Ohms (Automatic termination)		
Safety & EMC Certification	Energy Star / CE / FCC / ROHS/ E13	Energy Star / CE / FCC / ROHS / WEEE	Energy Star / CE / FCC / ROHS / WEEE
Vesa Standard Mount	100 x 100mm		
Stand Type	Picture Frame		
Colour	Black		
Button Position	Right Hand Side	Right Hand Side / Back	Right Hand Side
Packing Dimension	410 (W) x 410 (H) x 142 (D) mm	460 (W) x 460 (H) x 150 (D) mm	490 (W) x 510 (H) x 165 (D) mm
GROSS Weight	4.8 Kg	5.4Kg	6.3 Kg
Power Supply	12VDC, 3amp		
Voltage Power	AC100 - 240V 50 / 60Hz		
Power Consumption	<18W in ON Mode		
OSD Control	Contrast, Brightness, OSD Duration, H-Position, V-Position, Language, Picture Mode, Color Temp, Scale, Saturation, Backlight, Sleep Timer, Sound, Memory Recall		
OSD Language	English, French, German, Spanish, Italian, Russian, Polish and Portuguese		
Accessories	Power Supply / Kettle Lead /VGA Cable / Audio Cable / Remote Control / User Manual		

NB. Specification subject to change without notification

V1.01