



Product Features

- Industrial-grade DID LCD panel, suitable for 24/7 use.
- Resolution of 1280×1024.
- 5ms response time, no image ghosting.
- Utilizing the latest 3D digital filtering and 3D digital noise reduction technology.
- Fast picture response and 178° wide viewing angle, ensuring that the image does not deform fidelity digital
- High fidelity digital processing, brilliant and vivid video.
- Built-in audio.
- Easy to use menu and controller included

3D digital image processing

Dynamic optimization



Contrast enhancement




Natural color



Detail enhancement



Wide Viewing Angles(Up to 178°)

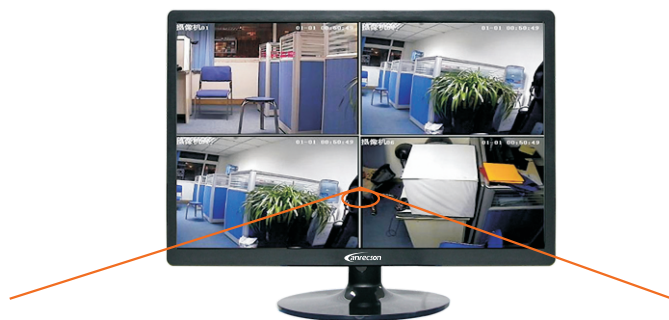

170°(H)/170°(V)

DISPLAY CHARACTERISTICS

Mode Name	LC-ME1901-BNC
Screen Size	19"
Active Display Area (mm)	376.32mm(W)×301.056mm(H)
Display Mode	4:3
LED Type	TFT-LED
Resolution	1280 × 1024
Display Color	16.7M
Pixel Pitch(mm)	0.248(H)×0.248(V)
Brightness(nits)	350cd/m²
Contrast Ratio	1000:1
Viewing Angle	178(H) / 178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER & MOUNT

Power	DC12V~24V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦ 15W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

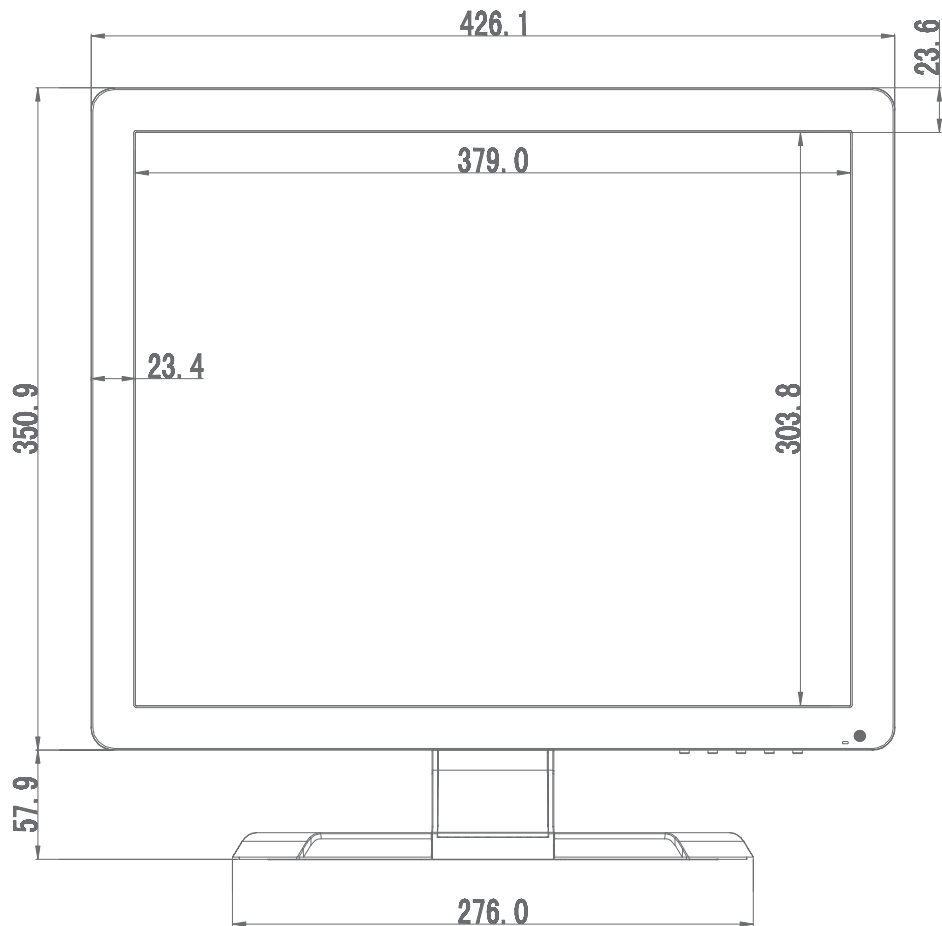

Unit:mm

