



Product Features

- 4K HD Monitor Solution
- Using all-imported industrial-grade LED screen, Designed for CCTV.
- High brightness, contrast and definition.
- Utilizing the latest 3D digital filtering and 3D digital noise reduction technology.
- Fast picture response; 178° viewing angle, ensuring that the image does not deform.
- Designed for 24/7 use for at least 5 years.
- Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference/radiation.
- Easy to use menu and controller included.

DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



4K UHD HD resolution

UHD Quality

3840P/2160P

4*FUHD/8*HD



DISPLAY CHARACTERISTICS

Mode Name	OM55-4K
Screen Size	55"
Active Display Area (mm)	1209.6mm(W)×680.4mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	3840 × 2160
Display Color	1.073G
Pixel Pitch(mm)	0.248(H)×0.248(V)
Brightness(nits)	350cd/m ²
Contrast Ratio	5000:1
Viewing Angle	178(H) / 178(V)
Response Time	5ms
Backlight	LED

INPUT & OUTPUT

DVI	1
VGA	1
DP	1
HDMI 2.0	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER & MOUNTING


Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦ 110W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	-------------------------------------------------------

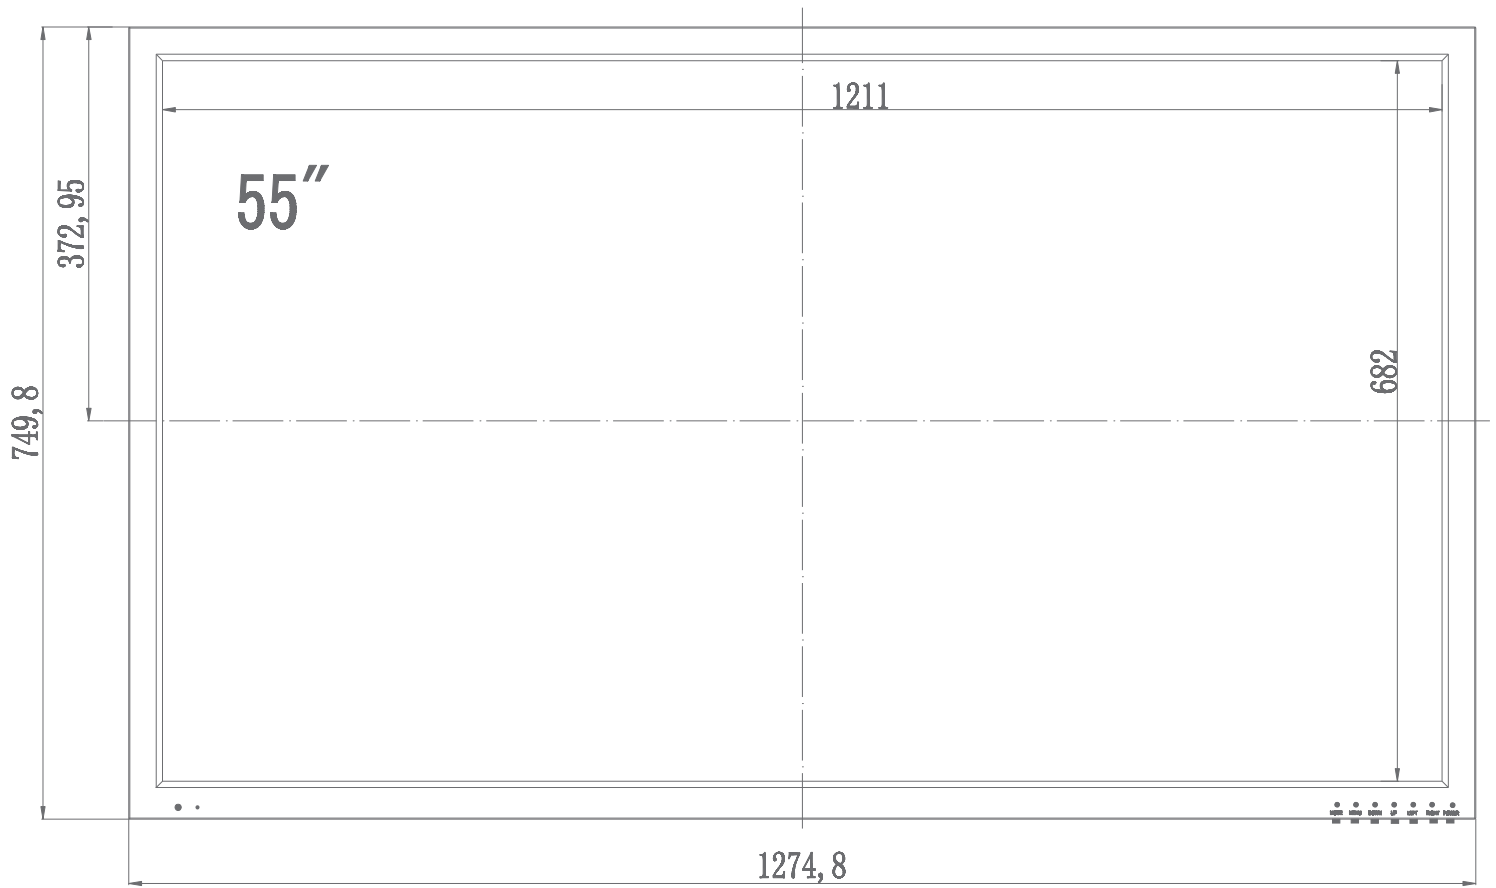

Unit:mm

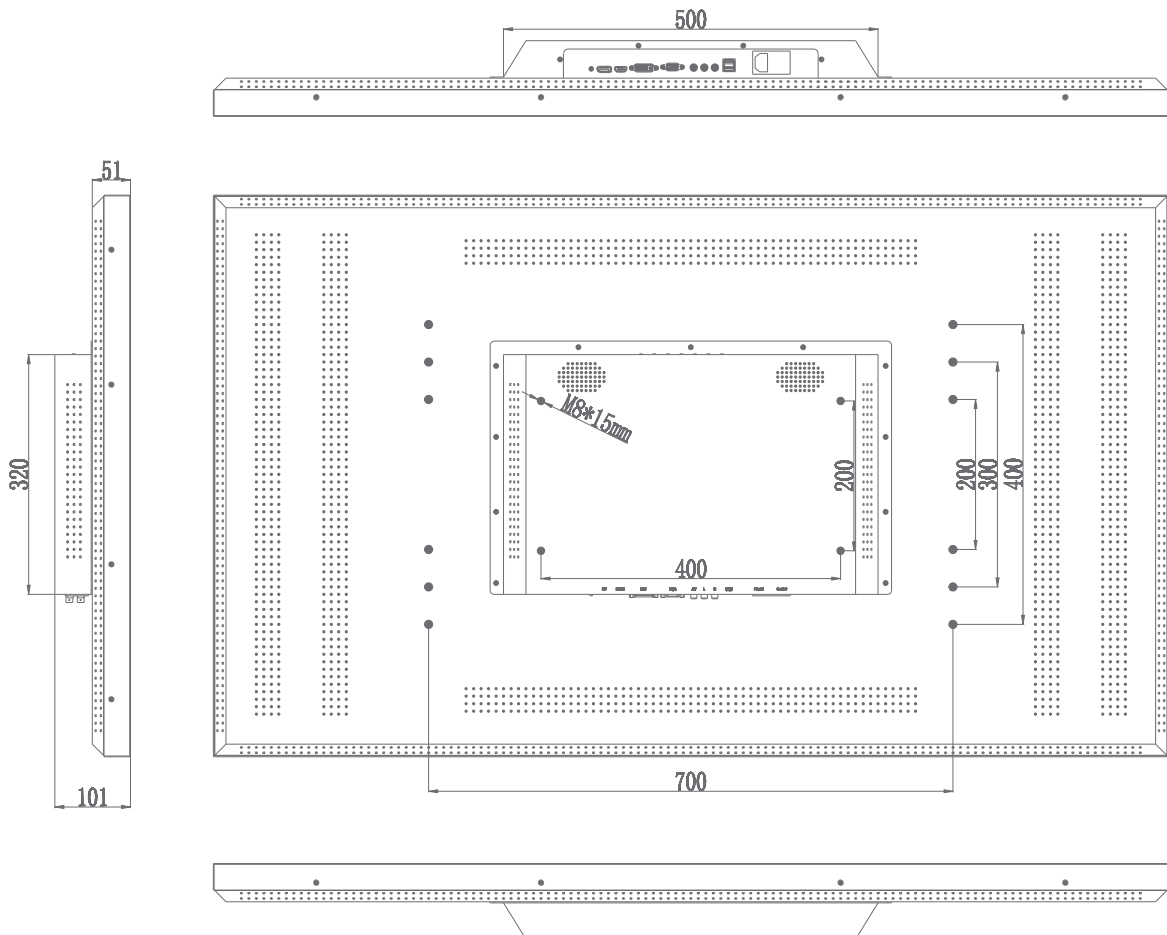

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.