

WIP2BVLG

2MP IP Lite IR Varifocal Bullet Camera with 2.8-12mm Lens

The WIP2BVLG is an IP IR varifocal bullet camera with a 2.8-12mm lens and 20-30m IR distance in ideal conditions. The camera has 1080P full real time coding as well as remote monitoring in a grey finish.





WIP2BVLG

Key Features

- 1080P full real time coding
- 20-30m IR distance (In ideal conditions)
- 2.8-12mm megapixel lens
- 3D DNR
- Digital WDR
- True day / night
- MIC / Line in G.711A / U Audio Codec
- IP and MAC address filtering
- Configuration backup
- Alarm image size dependent on set stream resolution
- RTSP streaming with or without authentication
- Mirror and flip image
- Multiple privacy masking
- Remote monitoring
- Supports smart phones and tablets

Dimensions (mm)

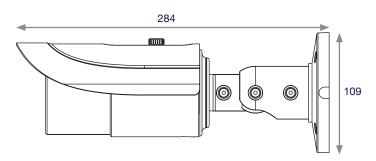





Specification

Model Number	WIP2BVLG
Camera	
Image Sensor	1/3" CMOS
Image Size	1920 x 1080
Electronic Shutter	1/25s ~ 1/100,000s
Effective Pixels	752 (H) x 582 (V)
Minimum Illumination	0 Lux (IR LED On)
Lens	2.8 ~ 12mm
Video Format	PAL / NTSC
Wide Dynamic Range	Yes
3D DNR	Yes
Image	
Video Compression	H.264
Resolution	1080P (1920 x 1080), 720P (1280 x 720), VGA (640 x 480), QVGA (320 x 240)
Multi-Stream	1920 x 1080 (1-30fps) / 1280 x 720 (1-30fps) 1280 x 720 (1-10fps) / 640 x 480 (1-30fps) / 320 x 240 (1-30fps)
Bit Rate	64Kbps ~ 4Mbps
Encode Mode	VBR / CBR
Audio Compression	G711A
Quality	Five levels under VBR, Freely adjustable under CBR
Image Settings	Saturation, Brightness, Contrast, etc (Adjustable through client software or web browser)
Interface	
Network	RJ45
Audio	One way audio (MIC in x1)
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Supports simultaneous monitoring for up to 4 Users. Supports multi-stream real time transmission
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Day & Night	ICR
Smart Alarm	Motion alarm
IR Distance	Up to 25m (In ideal conditions)
Others	
Ingress Protection	IP66
Power Supply	DC12V / PoE
Operating Environment	Temperature: -40°C ~ 50°C, Humidity: 10% ~ 90%
Dimensions	Ø109 x 284 (L) mm
Weight	1115g

Bioaccess Sales Ltd. reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.

Accessories



WIPJBBV

Junction Box for WIP and WAHD Varifocal Bullet Cameras



WIPJBBVG

Junction Box for WIP and WAHD Varifocal Bullet Cameras



WIPMPCM

Multi Purpose Corner Mount Bracket for WIP, WHD and WAHD Ranges



WIPMPPM

Multi Purpose Pole Mount Bracket for WIP, WHD and WAHD Ranges