



WIP3VD5

WISH IP 3MP IP IR Vandal Dome Camera

The WIP3VD5 is a True Day/Night, IP, IR Vandal Dome Camera with a 3.6mm , Varifocal Lens. With an effective IR of up to 20m in ideal conditions.




WIP3VD5

Key Features

- H.265 Video Compression
- 3MP Resolution
- Up to 20m IR Distance (In Ideal Conditions)
- 3.6mm Megapixel Lens
- 3D DNR
- Digital WDR
- True Day / Night
- Audio Input
- RTSP Streaming with or without Authentication
- P2P Connectivity
- Multiple Privacy Zone Masking
- Supports Smart Phones & Tablets on Own App

Dimensions (mm)

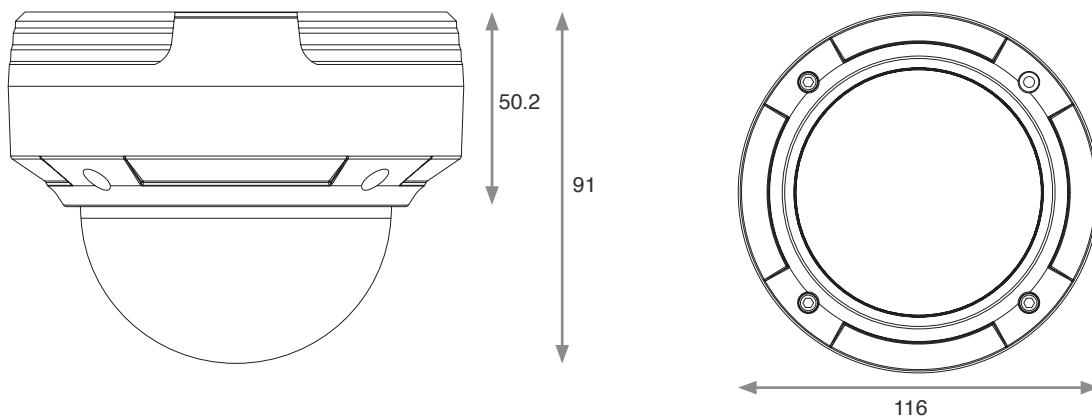



Technical Specification

Model Number	WIP3VD5
Image Sensor	1/3" CMOS
Image Pixels	2048 x 1536
Electronic Shutter	1/25s ~ 1/100,000s
Minimum Illumination	0 Lux (IR LED On)
Lens	3.6mm
WDR	Yes
3D DNR	Yes
Video Compression	H.265 / H.264 / MJPEG
Resolution	3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Multi-Stream	3MP (1-30fps) / 1920 x 1080 (1-30fps)
Bit Rate	64Kbps ~ 8Mbps
Encode Mode	VBR / CBR
Quality	Five Levels Under VBR, Freely Adjustable Under CBR
Image Settings	ROI Coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc
Network Interface	RJ45
Audio Compression	G711A/U
Audio Interface	One Way Audio (MIC In x1)
Online Connection	Support Simultaneous Monitoring for up to 10 Users
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network Remote Storage
Smart Alarm	Motion Alarm
Day & Night	ICR
IR Distance	Up to 20m (In Ideal Conditions)
IP Rating	IP66
Power Supply	DC12V / PoE
Power Consumption	<3W
Operating Conditions	Temperature: -20°C ~ 50°C
Dimensions (Ø x H)	Ø116 x 91 mm
Weight	381g

Genie CCTV reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.

Accessories

- **PSU1SM** - In-Line DC12V 1A Output, Regulated Switch Mode PSU, with Fixing Mount
- **FILTERKIT4** - Filter Set Up Kit
- **WIPJBVDV** - Junction Box for Varifocal Lens Vandal Domes