

WNVR232

32 Channel High Definition NVR



WNVR232

Key Features


- 32 Channels
- Apple & Android Mobile Phone Remote Viewing
- 3MP / 1080P / 960P / 720P Resolution
- User Friendly Graphic User Interface (GUI), Windows Style, Operation By Mouse
- Remote Control via IE or CMS: Preview, Playback, Backup, PTZ and Configuration
- Multi-Mode Recording: Manual, Sensor, Schedule and Motion
- Supports 16CH Playback
- Search: Time/Calendar, Events (Alarm, Motion)
- Flexible Backup via USB, Network or DVD-RW (Sata)
- Pentaplex: Live, Record, Playback, Backup and Remote Operation
- DHCP, DDNS, PPPoE, Network Protocol, IE Browse and CMS Supported
- Dual Stream Technology to Encode Recording Stream and Network Stream. User can adjust Network Stream to fit Bandwidth without changing Recording quality.
- Multi-User Online Simultaneously
- HDMI 1080P Output
- Support PTZ Preset and Auto Cruise, Up to 128 Presets and 8 Cruises

Technical Specification

Model Number	WNVNR232
Compression	Standard H.264 / MPEG4
CPU	Cortex A9
OS	Embedded Linux
Video Output	HDMI x1: 1080P (1920 x 1080) VGA x1: 1080P (1920 x 1080)
IP Input	3MP: 32CH@30fps, , 1080P: 32CH@30fps 960P: 32CH@30fps, 720P: 32CH@30fps
Audio	Input: 32CH IPC, Output: RCA x1, 2 Way Audio: RCA x1
Record Resolution	3MP: 2048 x 1536, 1080P: 1920 x 1080 960P: 1280 x 960, 720P: 1280 x 720, D1: 704 x 576
Frame Rate	800fps (PAL), 960fps (NTSC)
Bit Rate	256Kbps ~ 12Mbps
Encode	VBR/CBR
Quality	6 Level
Recording Mode	Manual, Timer, Motion, Sensor
File Manager	Lock, Unlock, Reversing Time
Playback	16CH
Search	Time/Calendar Search, Event (Motion, External Alarm)
Smart Search	Apply different colours to display whether a channel in a period of time recording or not
Function	Play, Pause, FF, FB, Digital Zoom
Alarm Mode	Sensor, Motion, Video Loss
Alarm Input	4CH Local Input, Support IPC Alarm Input
Alarm Output	1CH
Triggering	Record, Alarm Out, E-mail, etc
Network Interface	GMAC x1
Protocol	TCP/IP, UDP, DHCP, DNS, PPPOE, DDNS
Others	18 Users Online, Dual Stream
Mobile OS	iPhone, Android
Ports	RS485: x1, Support PTZ and Keyboard USB: USB2.0 x 2, USB3.0 x1
Remote Controller	Yes
Power Supply	DC12V
Working Environment	10 ~ 55°C, 10% ~ 90% Humidity
Dimensions (W x D x H)	430 x 300 x 55 mm

Features and specifications are subject to change for further improvement without any notice

Dimensions (mm)

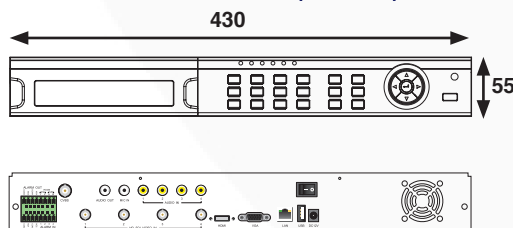

www.geniecctv.com
sales@geniecctv.com
T: +44 (0) 1707 330 541
F: +44 (0) 1707 330 543

Genie CCTV Ltd.
CCTV House, City Park,
Watchmead,
Welwyn Garden City,
Hertfordshire,
AL7 1LT,
United Kingdom