

## Datasheet

# DW-TLC-KIT - Toilet Door Locking Control Kit


### Product Description

The DW-TLC is operated by two touch-sensitive sensors. It controls entry by locking and unlocking the door at the appropriate times, interfacing with both the automatic door operator and the locking device.

**Entry:** Touch the external sensor. The door opener activates to provide access.

**Lock:** Touch the internal sensor to lock the door. To confirm the door is locked, the LEDs on both sensors flash showing the toilet is engaged and inhibiting the entry sensor.

**Exit:** Touch the internal sensor again. The indicator stops flashing. The door unlocks and the door opener activates. The entry sensor stops flashing and can provide access again.

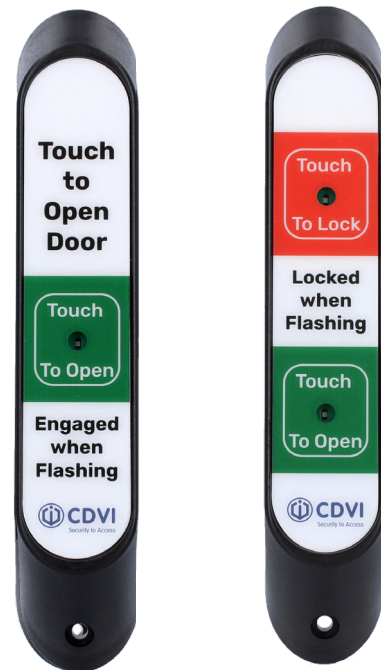

### Key Features

- Accessible toilet locking control for door automation
- MicroGuard™ anti-microbial coating to help combat the spread of infections
- Locked or unlocked when vacant (set by DIP switch)
- False occupancy protection
- Impulse latch and release to aid in assisted usage (set by DIP switch)
- Standard door contact included

 Certification

 DEEE

 Certification


 IP65

## Product Specifications

<b>Material:</b>	Glass filled nylon
<b>Mounting:</b>	Surface
<b>Technology:</b>	Touch-sensitive
<b>DIP switches:</b>	4
<b>Relays:</b>	1
<b>Contacts:</b>	NO/COM/NC
<b>Outputs:</b>	Key switch, lock, EDR
<b>Weight:</b>	0.23kg

## Electrical Specifications

<b>Power input:</b>	7-30Vdc
<b>Consumption:</b>	27mA

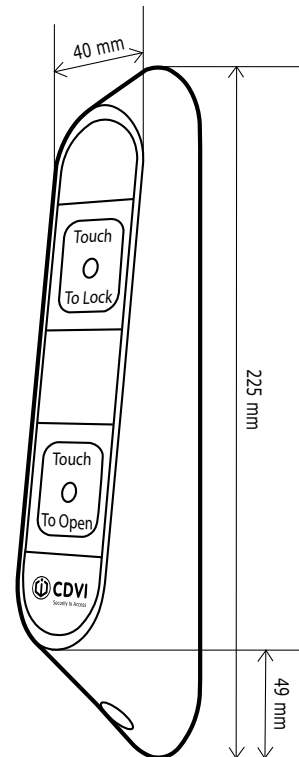

## Kit References

Kit includes the parts below:

E0901D000554	DW-TLC	Includes touchless entry and exit sensors with emergency override key switch (2 keys included), and controller (fitted in power supply)
F0301000015	PSMB123	Switch mode power supply, 12Vdc / 3A, small case
E0900000099	EM201	Double-pole resettable emergency door release
E0605000002	C3S11	Entry level surface 300kg magnetic lock, monitored
F0516000035	300-ZL	Z&L bracket for 300kg and 400kg magnetic locks
E0900D000033	KEY-ASMAKA	Surface architrave key switch, 2-position, maintained, keyed alike

*Note: The kit doesn't include the DIGIWAY door operator.*