Expandable 50 zone control panel



The i-onG2SM is a Grade 2 control panel with 10 zones on board, expandable to 50, and feature-packed to deliver you real benefits.

Built with cyber security in its DNA the i-onG2SM is SecureConnect™ Cloud and App enable.

Decimal expansion system

Expanders have 10 zones in addition to the 10 zones on the end station. It provides 25% more zones per expander than traditional 8 zone expanders. A 30 zone radio expander is also available.

Performance bus

Fit up to 20 bus devices: expanders, keypads or power supplies.

Semi-auto addressing

Prevents address duplication for bus mounted devices, saving hours of installation diagnostic time.

Audible bus device tracing

Locate any bus device quickly and easily. Reduce the time taken to complete maintenance and service calls.

At a glance...


- Ten zones expandable to 50
- 50 user codes
- SecureConnect[™] enabled
- · Range of keypad options
- · App for end user control and notification
- Common programming across the range



Scantronic product data sheet

Product specification

Product Code	i-onG2SM-KPZ
Compliance	EN50131 PD662:2017 Grade 2
Zones on board	10
Total number of buses	1
Number of users	50
Number of outputs	50 system plus 12 communicator
Number of part sets per partition	3
Number of partitions	5
Power supply	1A
Battery (maximum capacity)	1 x 7Ah
Temperature range	Environmental class 2 -10°C to 55°C 93% RH
Weight	2.8Kg - Panel without battery
Event log size	1,500
Remote communications	Ethernet included. Choice of plug on communicators for PSTN, GSM or 4G
Micro sd card	Yes
Dimensions	239mm (h) x 250mm (w) x 90mm (d)

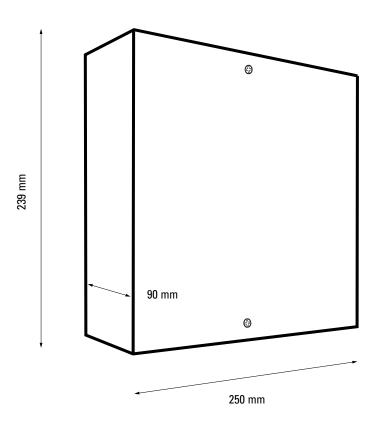

Tel: +44 (0)1594 545 400 Email: securitysales@eaton.com Web: www.myscantroic.com

 $\textbf{Compare product compatibility} \ with \ our \ easy \ to \ read \ chart: \ \underline{www.eaton.com/security-works-with}$



Eaton Electrical Sector EMEA Route de la Longeraie 7 1110 Morges, Switzerland

Security House, Vantage Point Business Village, Mitcheldean, Gloucestershire GL17 0SX