


LMEG08

8" LED Monitor Glass Fronted Metal Case



The LMEG08 8" LED Monitor offers excellent picture quality and a sleek and pleasant design normally associated with higher end units. An impressive 500:1 contrast ratio and 800 x 600 resolution and response time of 10-15ms gives you the ultimate performance and delivers crisp clear images.

VGA & BNC input capabilities providing various connection options. The slim design maximises desktop space and makes a perfect fit for almost any office or commercial application. The desk mount can be easily removed to allow the monitor to be fitted with any 75mm VESA accessories.

Key Features

- ▶ POS / ATM Terminals
- ▶ 800 (H) x 600 (V) Resolution
- ▶ Wide Viewing Angle
- ▶ High Contrast Ratio
- ▶ Multi language OSD
- ▶ Desktop or Wall Mount
- ▶ Fast Response Rate
- ▶ Complete with Power Supply

V1.01




LMEG08

8" LED Monitor

Specifications

Description / Model	LMEG08
MONITOR SPECIFICATION	
Panel Type	8" (4:3) LED Monitor With Glass Front
Case Type	Metal
Maximum Resolution	800 (H) x 600 (V)
Active Display Area	162.0 x 121.5 (V) mm
Pixel Pitch	0.675 (H) x 0.2025 (V) mm
Bezel Thickness	22mm
Contrast Ratio	500 : 1 Ratio
Brightness	250 cd/ m ²
Response time	10ms - 15ms
Viewing Angle	U/D: 50° / 70°, L/R: 70° / 70°
Display Colours	16.7 M
Video Synchronization	Yes
PC Compatible Frequency	30-80KHz(H) / 50-75Hz(V) Max. 800 x 600
Adjustable Colour Temperature	9300K / 6500K / 5800K / User
Video Compatibility	Multi-Standard for NTSC / PAL
Aspect Ratio	4 : 3 Ratio
VGA Auto Frequency Correction	Yes
Number of Speakers	No
Sound Demodulation	N/A
Mute	N/A
Work Temperature / Humidity	Temperature: -10 to 50 °C Humidity: 20 % - 70 %
Volume +/- Power On/Off	Power ON/OFF Only
OSD Control	Contrast, Brightness, Language, Colour, Rotation up/down & L/R, Input Source (VGA,AV1AV2), Reset
OSD Language	English, French, German, Spanish, Italian, Russian, Polish and Portuguese
NB. Specification subject to change without notification	

IN / OUT INTERFACE	
Video Interface	VGA In BNC In x 2
Audio Interface	None
Power Interface	AC In x 1
Termination	75 Ohms (Automatic termination)
Safety & EMC	ROHS-2, CE, FCC, C-Tick, E13, WEEE
Vesa Standard Mount	75mm x 75mm
Stand Type	Multi Functional Desktop/Wall mount
Colour	Black
Packing Dimension	283 (W) x 295 (H) x 105 (D) mm
NET Weight	1.4 Kgs
GROSS Weight	2.0 Kgs
POWER	
Power Supply	12VDC, 1 amp
Voltage	AC100 - 240V 50 / 60Hz
Power Consumption	< 12W in "ON"
Accessories	Power Supply, Remote Control, Multi Functional Bracket Desktop/Wall Mount, User Manual.

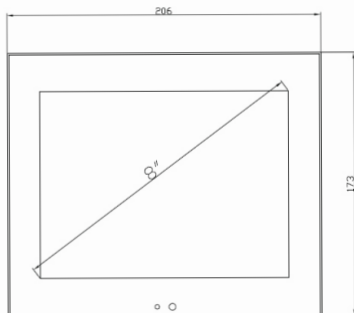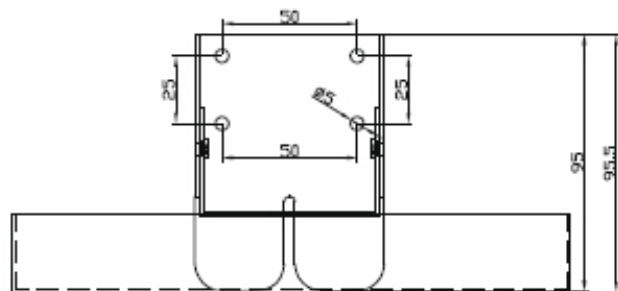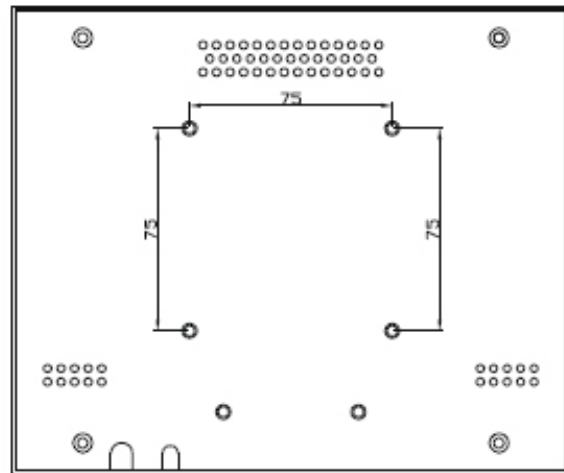

V1.01