


NDA compliant fixed IP turret cameras with audio and visual deterrent

VIP-T5MP28IRWLM, VIP-T5MP40IRWLM, VIP-T8MP28IRWLM & VIP-T8MP40IRWLM

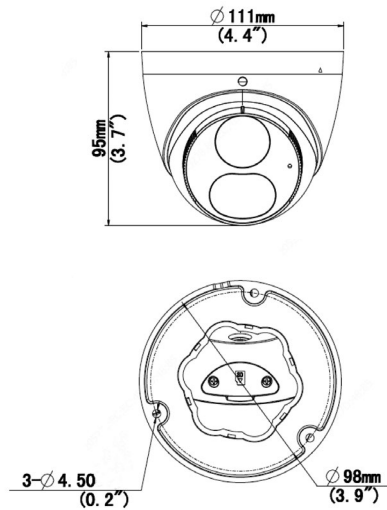

KEY FEATURES

NDA compliant - NOVATEK chipset

5/8MP fixed 2.8mm/4.0mm turrets

Low light sensitive

30m IR illumination

IP67 ingress protection

H.264/H.265 triple streaming

ONVIF compliant ONVIF Profile S, G and T

Storage - microSD card up to 256GB

Corridor mode

Internal mic

Internal speaker (uploadable audio file) and white LED illumination (10m) deterrent

Analytics including: cross line detection, intrusion detection, enter area detection, leave area detection, face detection

Vista's VIP series of IP cameras are fully NDA compliant, allowing you peace of mind in offering one, consistent range that satisfies requirements across both private business and public sector projects.

The VIP fixed focal length turret cameras are easy to adjust and versatile, making them a great choice for small to medium environments.

Producing wide angle imagery in 5 or 8MP image resolution with no IR bounce during night-time mode. IP67 rated against water and dust.

This turret has 3 modes:

- 1) IR Mode - where only IR is used;
- 2) Dual light Mode - Once IR is triggered WLED & Audio are activated;
- 3) White LED Mode - where only White LED is used.

Delivering up to 3 streams in multiple formats inc. H.264, allowing you to optimise the quality of the video based on application. The latest H.265 technology reduces the levels of bandwidth and storage required. Low light technology provides IR illumination up to 30m.

Other features include Edge storage via MicroSD card slot that can take cards up to 256gb, PoE and an internal microphone.

Accompanying the VIP series of cameras is the VIP series of IP NVR recorders - also NDA compliant.

To learn more about Vista's NDA compliant video surveillance products please visit www.norbain.com/brands/vista

TEL +44 (0) 118 912 5000



* To scan the QR code, make sure your phone/device has a suitable reader. Most modern Android and iOS smartphone cameras will automatically scan the code and provide the product's URL link, which will open from the device's web browser.

TECHNICAL SPECIFICATION

Model	VIP-T5MP28IRWLM	VIP-T5MP40IRWLM	VIP-T8MP28IRWLM	VIP-T8MP40IRWLM
CAMERA				
Image Sensor	1/2.7" 5MP, CMOS		1/2.8" 8MP, CMOS	
Min Illumination	Colour: 0.002 Lux@F1.6		Colour: 0.0025 Lux@F1.6	
WDR	120dB WDR			
Shutter Time	1/100000s-1s			
Day/Night Mode	Day/Night/Auto/manual IR Cut filter			
Signal/Noise	>56dB			
LENS				
Focal Length	2.8mm fixed	4.0mm fixed	2.8mm fixed	4.0mm fixed
Focus Control	Auto			
Aperture Control	F1.6 Fixed			
IR ILLUMINATION				
IR Distance Wavelength	Up to 30m 850nm			
White Distance Wavelength	Up to 10m visible range			
VIDEO				
Max. Image Resolution	2880 × 1620		3840 × 2160	
Primary Stream	5MP (2880 × 1620), Max 30fps; 4MP (2560 × 1440), Max 30fps; 3MP (2304 × 1296), Max 30fps; 1080P (1920 × 1080), Max 30fps (8MP camera only) (3840 × 2160), Max 20fps;)			
Secondary Stream	720P (1280 × 720), Max 30fps; D1 (720 × 576), Max 30fps; 640 × 360, Max 30fps (8MP Camera only) 1080P (1920 × 1080), Max 30fps; D1 (720 × 576), Max 30fps; 2CIF(704 × 288), Max 30fps; CIF (352 × 288), Max 30fps)			
Tertiary Stream	D1 (720 × 576), Max 30fps; 640 × 360, Max 30fps; 2CIF (704 × 288), Max 30fps; CIF (352 × 288), Max 30fps;			
Video Compression	H.265, H.264, MJPEG			
Privacy Masking ROI	4 masks 8 ROI			
INTERFACES				
Ethernet	1 × RJ45 10M/100M			
Alarm Audio I/O	Internal mic and speaker only			
NETWORK				
ONVIF	Profile S, G and T			
Network Storage	NAS, ANR			
Web Browser	Plug-in required IE 10 and above. Chrome 45, Firefox 52 and Edge 79 min.			
Security	Strong password, HTTPS, digest authentication for RTSP, TLS 1.2, WSSE and digest authentication for ONVIF			
Protocol	IPv4/6, IGMP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP,SSL/TLS, SSH			
AUDIO - 2-WAY				
Built-in Mic Speaker	Yes Yes			
Audio Compression	G.711			
Audio Sampling Rate Bit rate	8KHz 64Kbps			
INTELLIGENT ANALYTICS				
Video Analysis	Cross line, Intrusion, Enter and leave area detection, People counting and Face detection			
EVENT AND STORAGE				
Edge Storage	MicroSD, 256GB max			
Event Trigger	Motion, Tampering and Audio detection			
GENERAL				
Working Condition	-30°C - 60°C (-22°F - 140°F); Humidity: ≤95% RH (non-condensing)			
Environment	IP67			
Power Supply	DC 12V/1A, PoE (IEEE 802.3af)		DC 12V/2A, PoE (IEEE 802.3af)	
Power Consumption	7.5W		10.5W	
Surge Protection	4KV			
NET Dimensions Weight	Φ111 × 95mm (Φ4.4" × 3.7") 0.43kg			
COMPLIANCE				
NDAA	Yes, Novatek chipset			

MODELS IN THIS RANGE

0911560	VIP-T5MP28IRWLM
5MP 2.8mm IR & LED Turret	
0911570	VIP-T5MP40IRWLM
5MP 4.0mm IR & LED Turret	
0911580	VIP-T8MP28IRWLM
8MP 2.8mm IR & LED Turret	
0911590	VIP-T8MP40IRWLM
8MP 4.0mm IR & LED Turret	

ASSOCIATED PRODUCTS

0916500	VIP-JB02
Junction box for fixed lens VIP-D & T	
0916560	VIP-JBWM02
Junction box and wall mount for fixed lens VIP-D&T	
0916600	VIP-PM03
Pole mount for VIP-JBWM01/02/03 (requires 0916500 or 0916560)	
0916620	VIP-SS-02
Sun shield for VIP-JB03/04 (requires 0916520)	
0785200	VPSU12-1000e
12VDC 1A Encapsulated	
0785210	VPSU12-2000e
12VDC 2A Encapsulated	
0785220	VPSU1221EXTe
12VDC 1 x 2A, IP68	
0785240	VPSU1244EXTe
12VDC 4 x 1A , IP68	

OTHER PRODUCTS

0338110	VFS118WHDA 18.5"
Monitor TVI/AHD/CVBS/HDMI & VGA	
0773530	VFS121WHDA 21"
Monitor TVI/AHD/CVBS/HDMI & VGA	
0908420	VSW4
4 port PoE switch dual uplink	
0908430	VSW8
8 port PoE switch dual uplink	
0908440	VSW16
16 port PoE switch dual uplink	
0908450	VSW24
24 port PoE switch dual uplink	
0480540	CAT5e/UTP/305/PVC/GREY
305m Cat5e PVC cable drum - grey	
0480560	CAT5e/UTP/305/LSZH/VIOLET
305m Cat5e LSZH cable drum - violet	
0480580	CAT5e/UTP/305/DUCT/BLACK
305m Cat5e DUCT cable drum - black	
0480610	CAT6/UTP/305/PVC/GREY
305m Cat6 PVC cable drum - grey	
0480620	CAT6/UTP/305/LSZH/VIOLET
305m Cat6 LSZH cable drum - violet	
0480630	CAT6/UTP/305/DUCT/BLACK
305m Cat6 DUCT cable drum - black	
0853330	VCP-RJ45-Cat5-10
RJ45 Plugs × 10	
0853350	VCP-RJ45-Cat6-10
RJ45 Plugs × 10	
0853320	VSCT-RJ45
RJ45 crimp tool	
0853380	VFCP-RJ45-Cat5-10
RJ45 FAST plug × 10	
0853400	VFCP-RJ45-Cat6-10
RJ45 FAST plug × 10	
0853370	VFCT-RJ45 FAST
RJ45 FAST crimp tool	
0872170	DIAMOND4K
All in one CCTV\IP\Cable Test Monitor	

